


IMPULSE LED M
 painted aluminum, plastic PC

■ 8116




IMPULSE LED S 8115

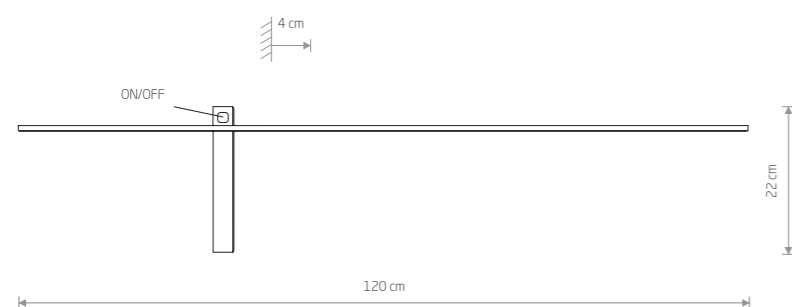

IMPULSE LED L
 painted aluminum, plastic PC

■ 8117

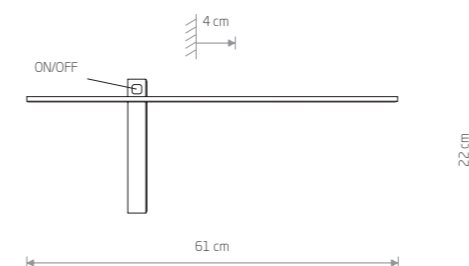

IMPULSE LED S
 painted aluminum, plastic PC

■ 8115



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8115	6W LED	3000K	200 lm	120°	≥80	~220-230 V, 50/60 Hz	☐	>0,5	IP23	30000h
8116	10W LED	3000K	350 lm	120°	≥80	~220-230 V, 50/60 Hz	☐	>0,5	IP23	30000h
8117	15W LED	3000K	500 lm	120°	≥80	~220-230 V, 50/60 Hz	☐	>0,5	IP23	30000h